






limba

MAGNET & FRAME
SERIES
"20

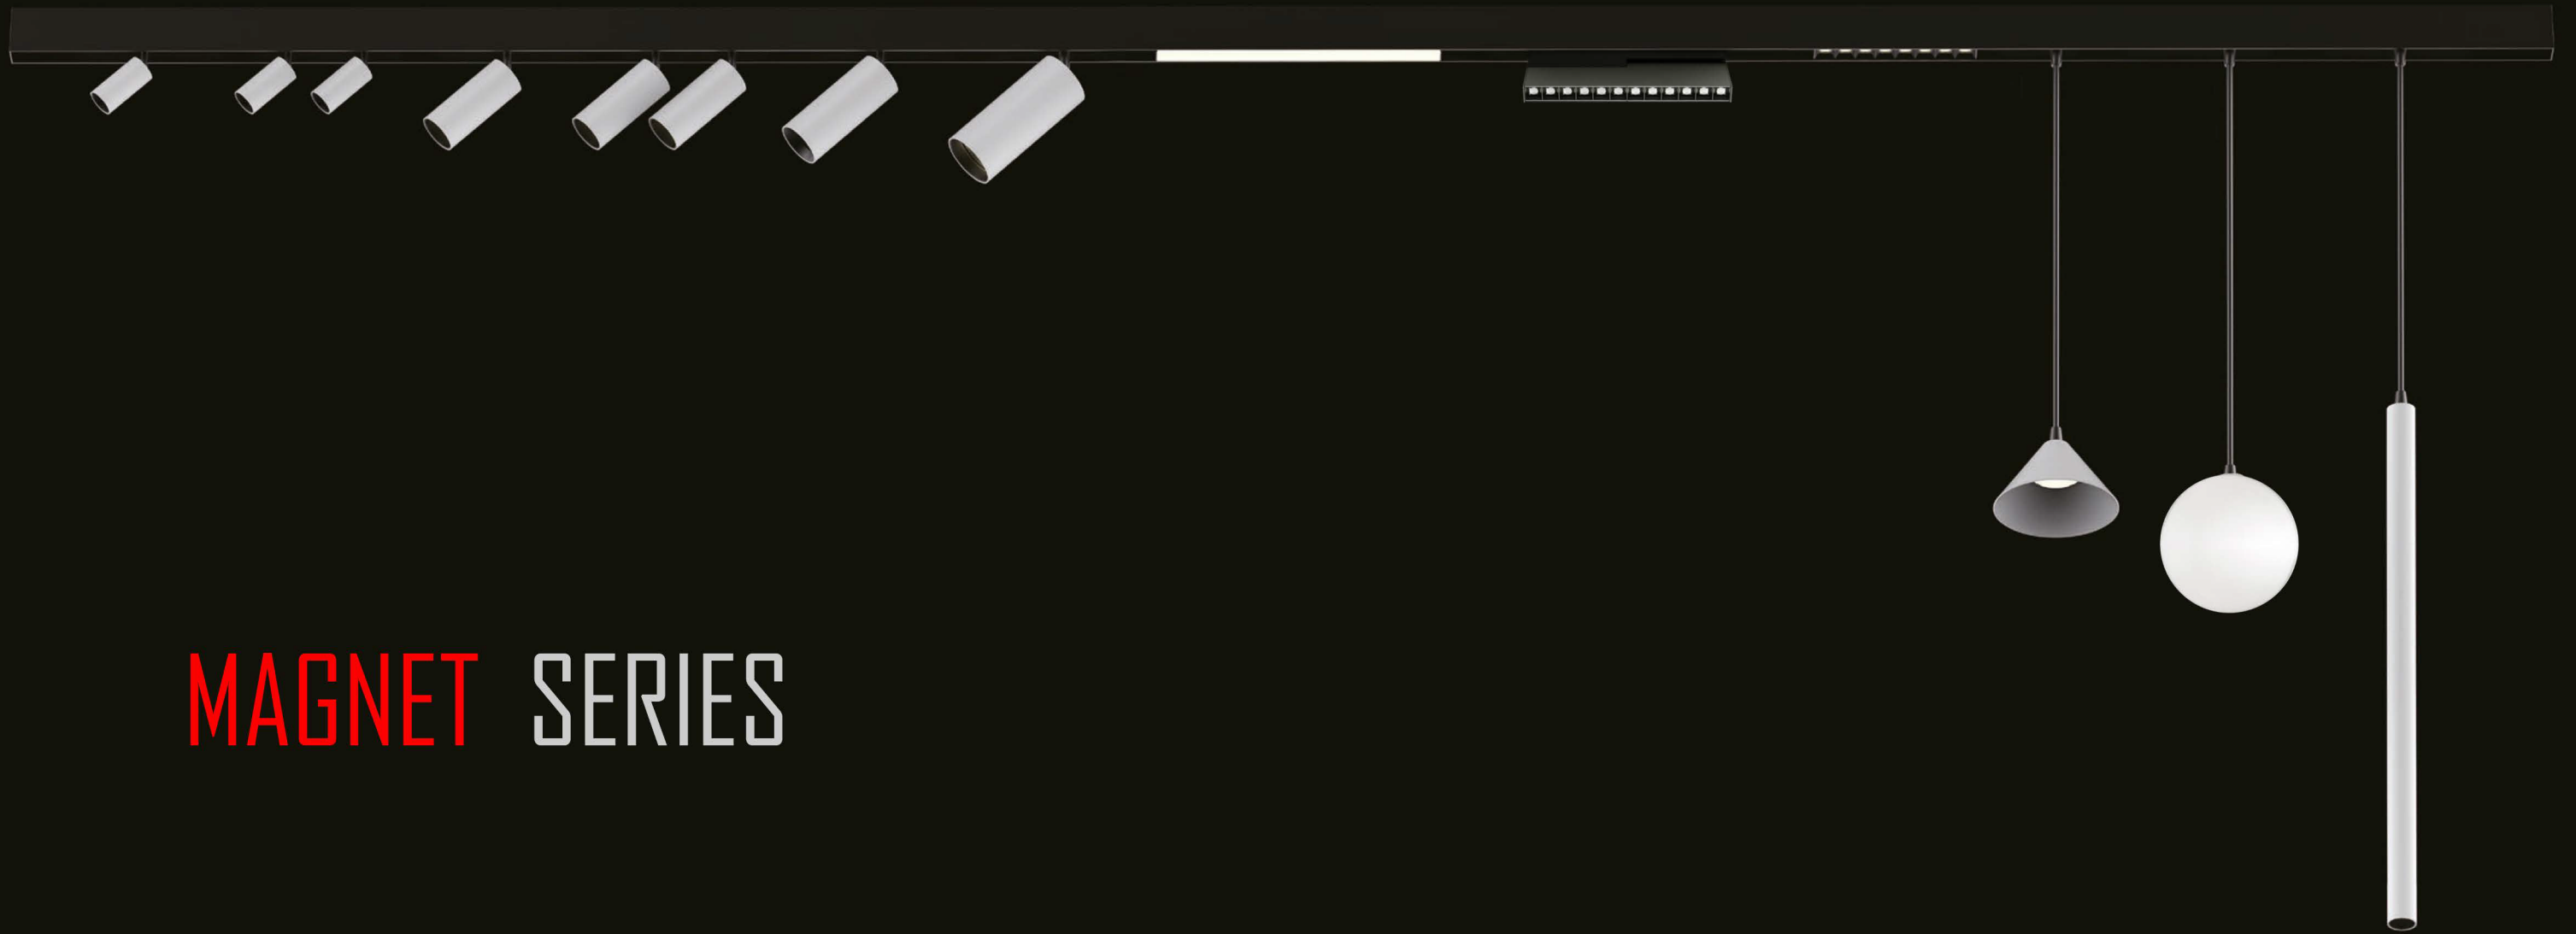


MAGNET SERIES

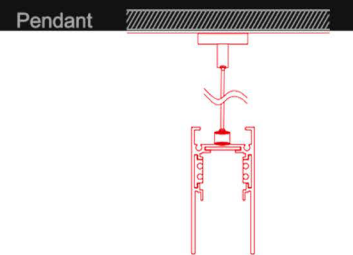


Trak Kurulum Yöntemleri / Track Installation Methods


SARKIT PENDANT

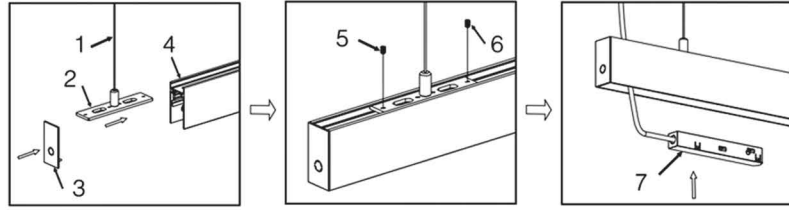

- | | | |
|-----------------------|--|-------------------|
| 1- Askı Teli | | Suspension Wire |
| 2- Montaj plakası | | Mounting Plate |
| 3- Yan Kapak | | Side Cover |
| 4- Ray | | Track |
| 5- Vida | | Screw |
| 6- Vida | | Screw |
| 7- DC Bağlantı Kutusu | | DC Connecting Box |

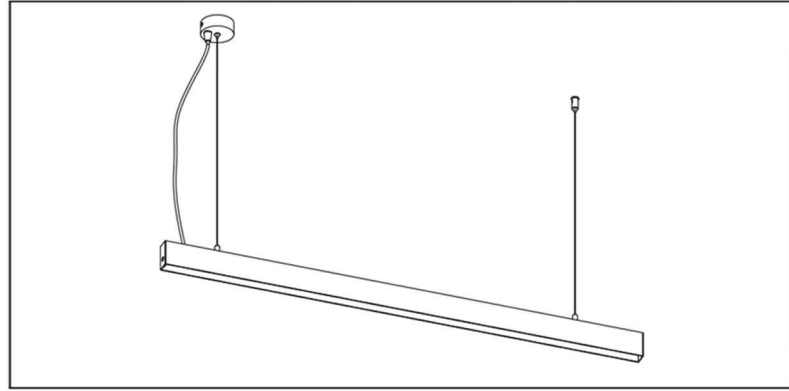


SIVAÜSTÜ SURFACE

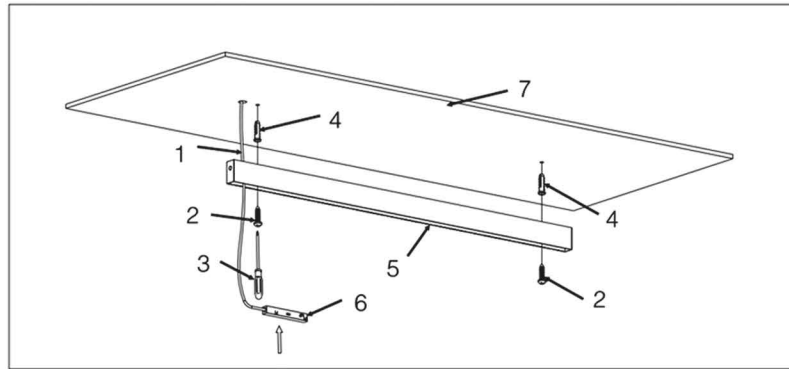


- | | | |
|-----------------------|--|-------------------|
| 1- DC 48V Girişi | | DC 48V Input |
| 2- Vida | | Screw |
| 3- Tornavida | | Screw Driver |
| 4- Genleşme Vidası | | Expansion Screw |
| 5- Ray | | Track |
| 6- DC Bağlantı Kutusu | | DC Connecting Box |
| 7- Tavan | | Ceiling |


SIVAALTI RECESSED

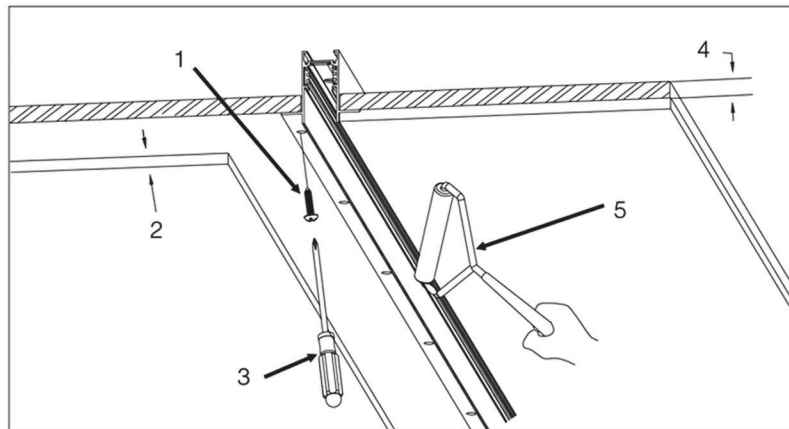

- | | | |
|---------------------|--|-----------------------|
| 1- Vida | | Screw |
| 2- 9 <Alçıpan <12mm | | 9< Gypsum Board <12mm |
| 3- Tornavida | | Screw Driver |
| 4- Atel Tavan >12mm | | Splint Ceiling >12mm |
| 5- Sivama | | Plastering |

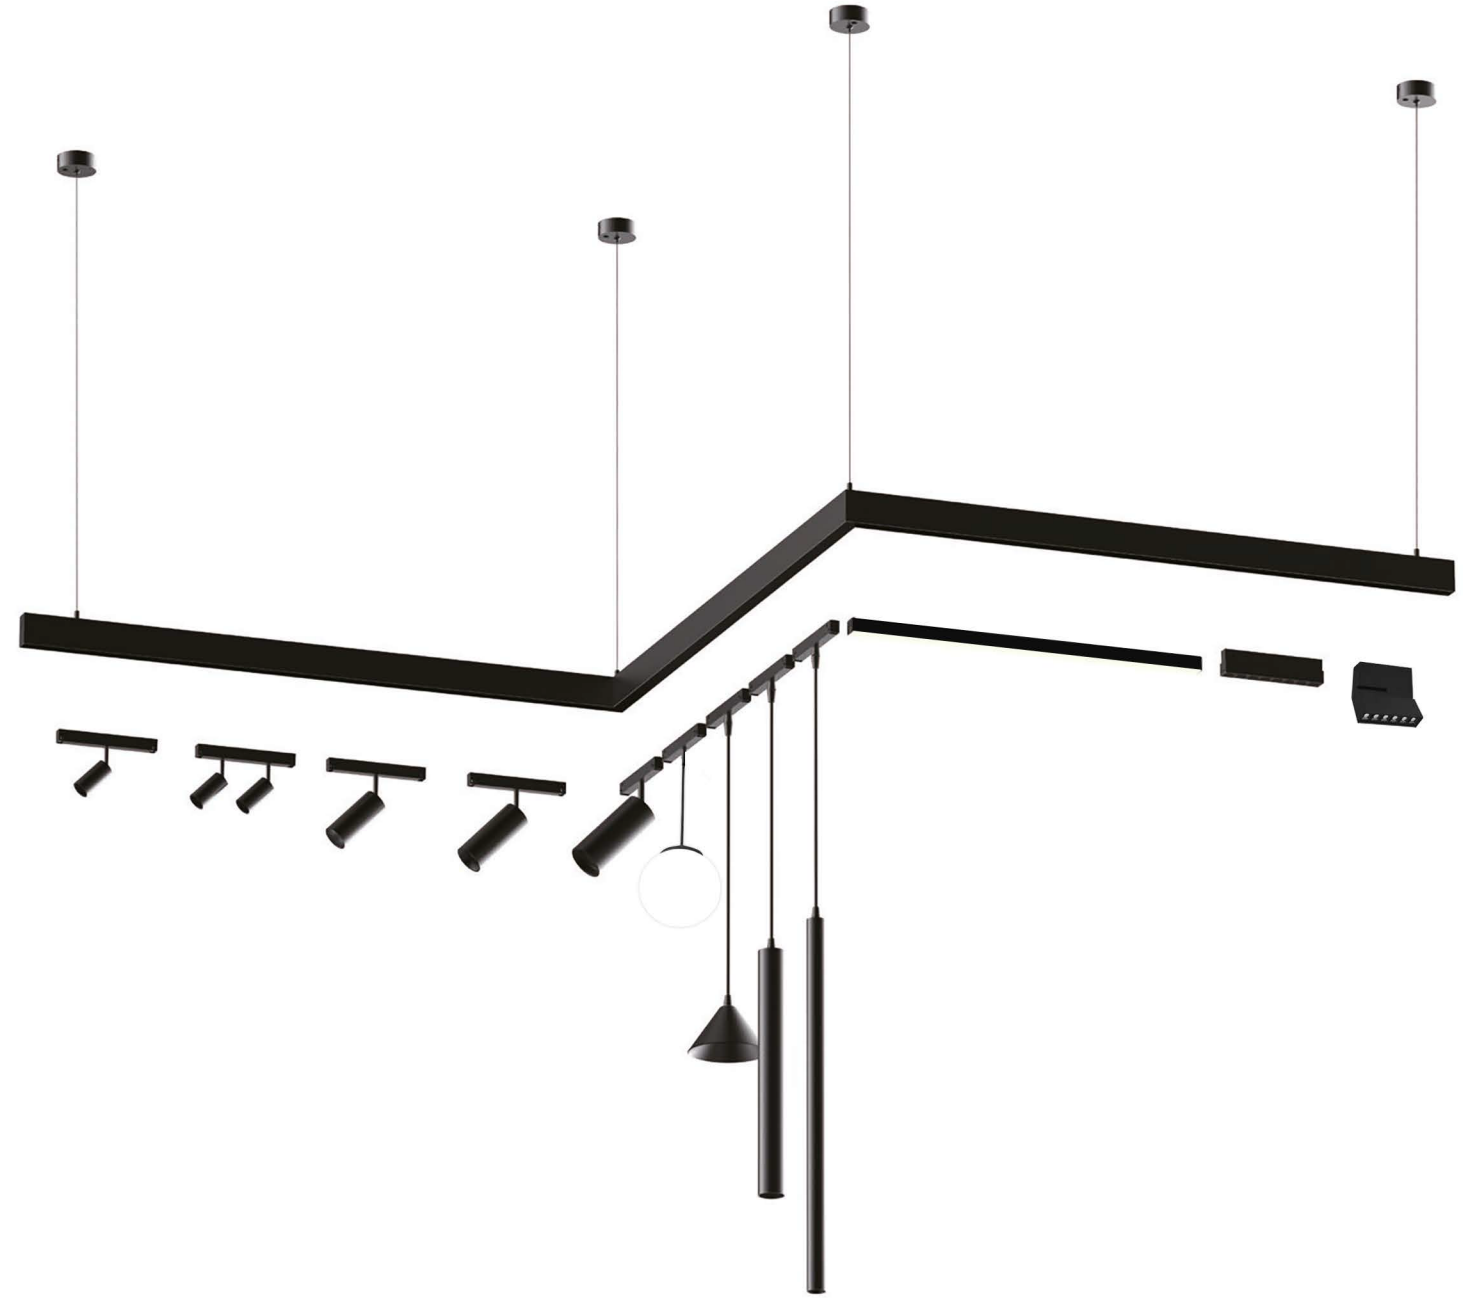


Özellikleri / Features




Mıknatıs Sistem
Magnet System



WiFi Teknolojisi
WiFi Technology

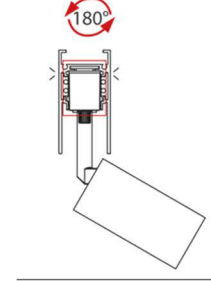


Çift Yönlü Kurulum
Bidirectional Installation

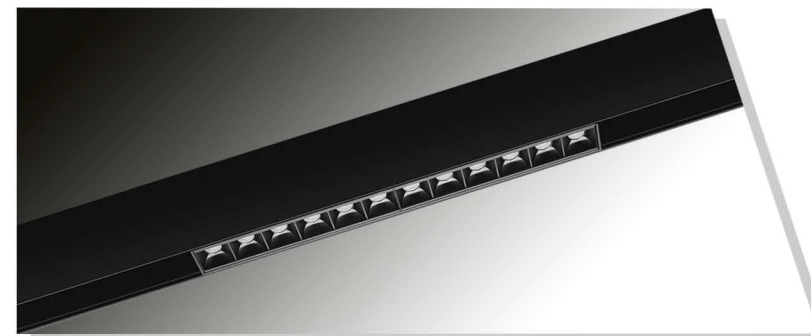


MG-D Series

SMD POWER LED
 DC 24V - DC48V Input Voltage
 IP40
 Beam Angle: 15° - 30° - 45°
 Lamp Life: 50.000h
 2700K - 3000K - 4000K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type




MG- D5

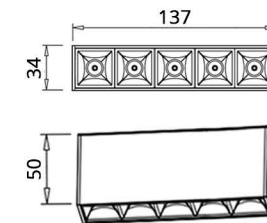


Source Type: SMD
 Lamp Load: 5W - 10W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x137mm

MG- D10

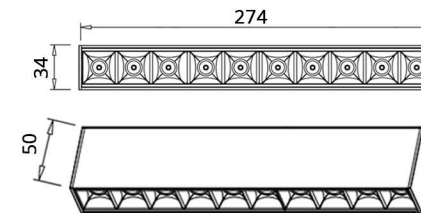

Source Type: SMD
 Lamp Load: 10W - 20W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x274mm

MG- D15

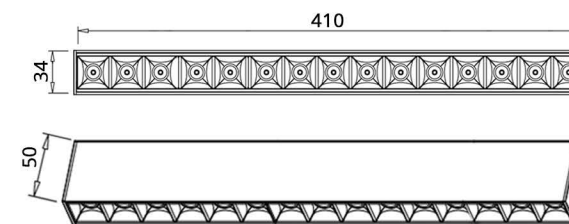


Source Type: SMD
 Lamp Load: 15W - 30W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x410mm




MG-DA Series

SMD POWER LED
 DC 24V - DC48V Input Voltage
 IP40
 Beam Angle: 15° - 30° - 45°
 Lamp Life: 50.000h
 2700K - 3000K - 4000K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type




MG- DA5

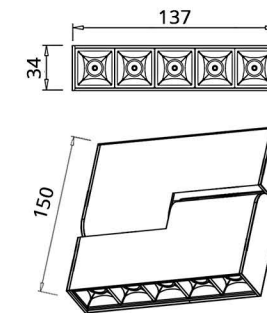


Source Type: SMD
 Lamp Load: 5W - 10W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x150x137mm

MG- DA10

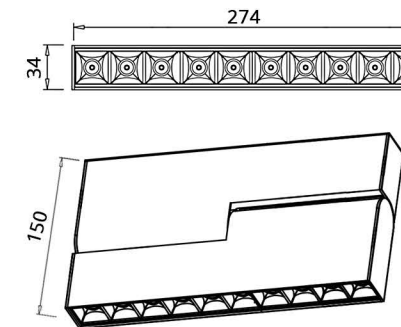

Source Type: SMD
 Lamp Load: 10W - 20W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x150x274mm

MG- DA15

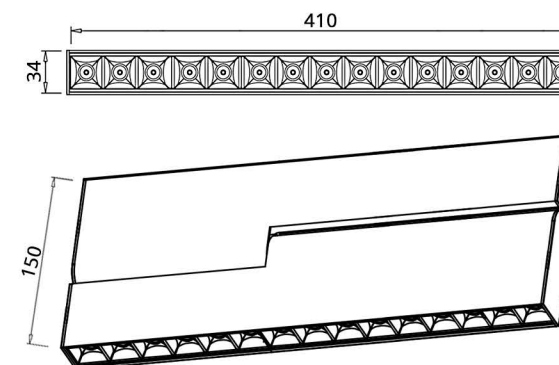


Source Type: SMD
 Lamp Load: 15W - 30W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x150x410mm




MG-L Series

SMD POWER LED
 DC 24V - DC48V Input Voltage
 IP40
 Beam Angle: 120°
 Lamp Life: 50.000h
 2700K - 3000K - 4000K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type




MG- L137

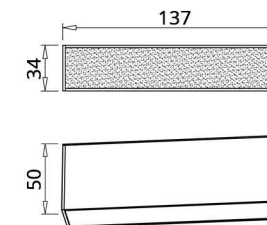


Source Type: SMD
 Lamp Load: 5W - 10W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x137mm

MG- L405

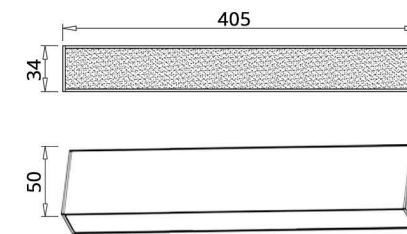


Source Type: SMD
 Lamp Load: 10W - 20W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x405mm

MG- L675

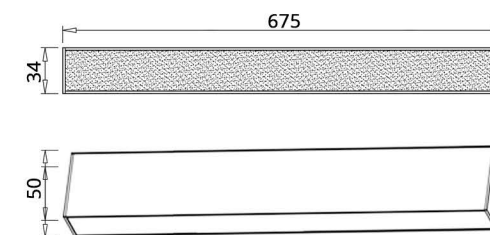

Source Type: SMD
 Lamp Load: 15W - 30W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x675mm

MG- L945

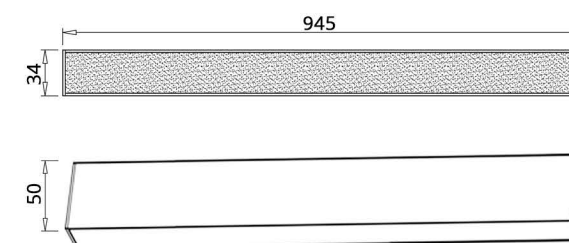


Source Type: SMD
 Lamp Load: 30W - 40W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x945mm




MG-S Series

SMD POWER LED & COB LED
 DC 24V - DC48V Input Voltage
 IP40
 Beam Angle: 15° - 30° - 45°
 Lamp Life: 50.000h
 2700K - 3000K - 4000K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type




MG- S25

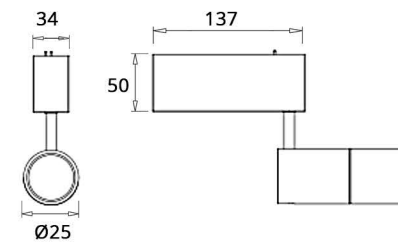


Source Type: SMD
 Lamp Load: 3W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: Wallwasher
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x137mm

MG- S35

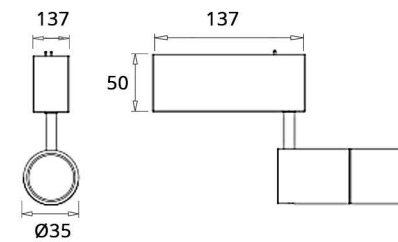


Source Type: SMD
 Lamp Load: 5W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: Wallwasher
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x137mm

MG- S50

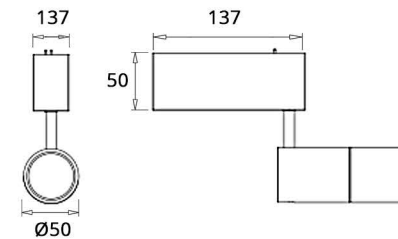

Source Type: COB
 Lamp Load: 10W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: Wallwasher
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x137mm

MG- S60

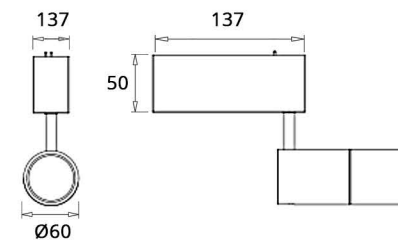


Source Type: COB
 Lamp Load: 15W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: Wallwasher
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x137mm




MG-SS Series

SMD POWER LED
 DC 24V - DC48V Input Voltage
 IP40
 Beam Angle: 15° - 30° - 45°
 Lamp Life: 50.000h
 2700K - 3000K - 4000K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type




MG-SS25

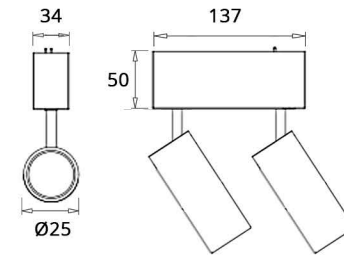

Source Type: SMD
 Lamp Load: 2*3W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: Wallwasher
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x137mm

MG-SS35

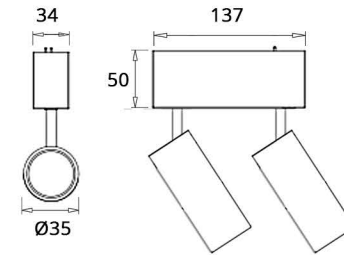


Source Type: SMD
 Lamp Load: 2*5W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: Wallwasher
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: 34x50x137mm




MG-FC Series


COB LED
 DC 24V - DC48V Input Voltage
 IP40
 Beam Angle: 15° ~ 60° focus
 Lamp Life: 50.000h
 2700K - 3000K - 4000K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type



MG-FC90

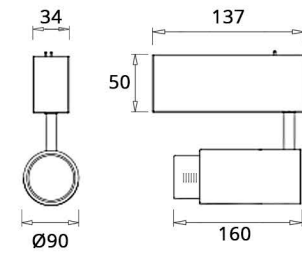


Source Type: COB
 Lamp Load: 15W - 20W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: Wallwasher
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø90x160x170mm

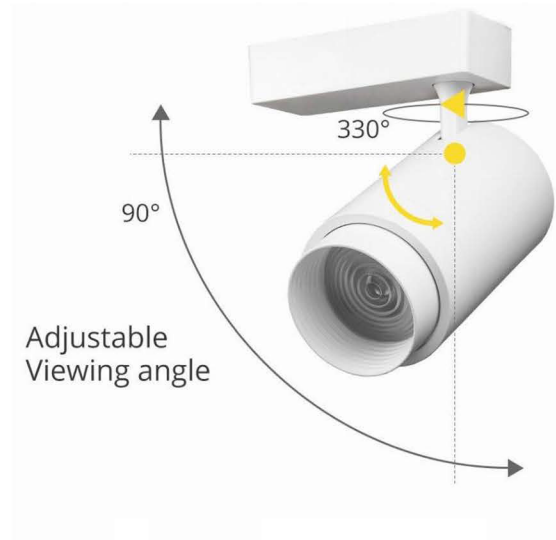




MG-T Series

SMD POWER LED & COB LED
 DC 24V - DC48V Input Voltage
 IP40
 Beam Angle: 15° - 30° - 45°
 Lamp Life: 50.000h
 2700K - 3000K - 4000K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type




MG- T01

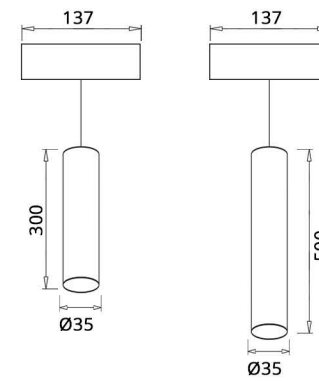


Source Type: SMD
 Lamp Load: 5W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø35x300x137mm
 Ø35x500x137mm

MG- T02

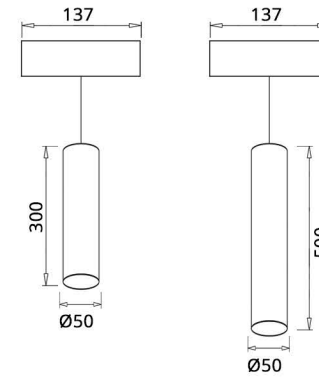

Source Type: COB
 Lamp Load: 7W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø50x300x137mm
 Ø50x500x137mm

MG- T02

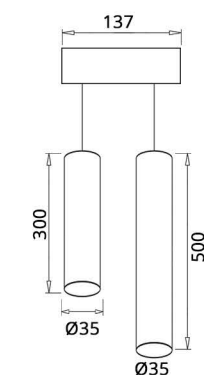


Source Type: COB
 Lamp Load: 2*5W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 15° - 30° - 45°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø35x300x137mm
 Ø35x500x137mm




MG-L Series

SMD POWER LED
 DC 24V - DC48V Input Voltage
 IP40
 Beam Angle: 90°
 Lamp Life: 50.000h
 2700K - 3000K - 4000K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type




MG- L01

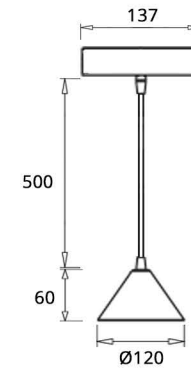


Source Type: SMD
 Lamp Load: 5W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 90°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø120x60x500x137mm

MG- L02

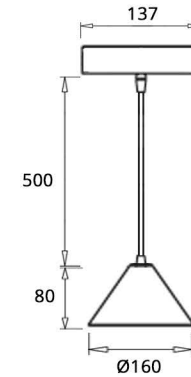

Source Type: SMD
 Lamp Load: 7W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 90°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø160x80x500x137mm

MG- L02

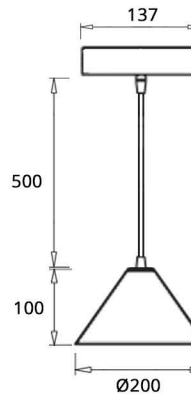


Source Type: SMD
 Lamp Load: 12W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: 90°
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø200x100x500x137mm




MG-B Series

SMD POWER LED
 DC 24V - DC48V Input Voltage
 IP40
 Lamp Life: 50.000h
 2700K - 3000K - 4000K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type




MG- B01

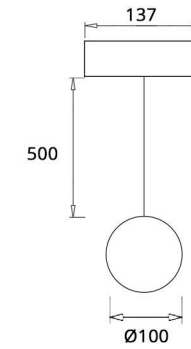


Source Type: SMD
 Lamp Load: 3W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø100x500x137mm

MG- B02

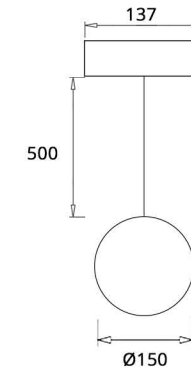

Source Type: SMD
 Lamp Load: 6W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø150x500x137mm

MG- B02


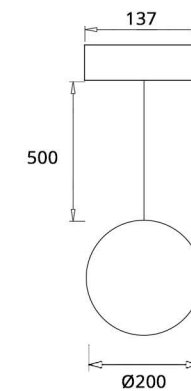


Source Type: SMD
 Lamp Load: 10W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 CCT: 2700K - 3000K - 4000K
 Lamp Life: 50.000h
 Size: Ø200x500x137mm



EXT Series

SMD POWER LED
 DC 24V - DC48V Input Voltage
 IP40
 Lamp Life: 50.000h
 CCT: 6500K
 CRI: >90
 TRIAC / DALI / 0-10V / 1-10V / PWM Control Type

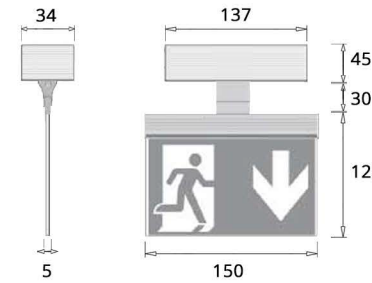

Source Type: SMD
 Lamp Load: 5W
 Input Voltage: DC 24V - DC48V
 Output Lumens: 500Lm(3000K)
 Beam Angle: Wallwasher
 CCT: 6500K
 Lamp Life: 50.000h
 Size: 150x120x5mm

Luminaire Type



EXT- 01



EXT- 02



EXT- 03



EXT- 04



EXT- 05



EXT- 06



EXT- 07



EXT- 08



EXT- 09



EXT- 10